




STANDARD TOLERANCES		
D	+0.003 -0.000	+0.007 -0.000
B	-0.004 -0.007	-0.01 -0.02
G	±0.15	±.3
N	+0.20 -0.00	+5.0 -0.0
L	+0.30 -0.00	+1.0 -0.0
H	+0.00 -0.10	+0 -2
T	+0.00 -0.02	+0.00 -0.05
	INCH	METRIC

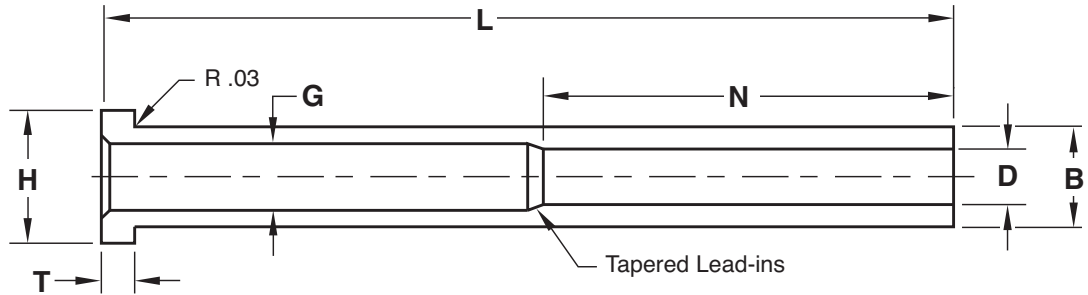

**Material**

H-13

Core = 40-44 Rc

Nitrided ID/OD to 70-75 Rc

A-2

Core = 58-60 Rc

Treatment = Nicklon®

Other:

Material \_\_\_\_\_

Core Hardness \_\_\_\_\_

Surface Hardness \_\_\_\_\_

Treatment \_\_\_\_\_

SLEEVE #1			
Dimension	Tolerance		
<b>D</b>	<input type="checkbox"/> Standard	+	
		-	
<b>B</b>	<input type="checkbox"/> Standard	+	
		-	
<b>G</b>	<input type="checkbox"/> Standard	+	
		-	
<b>N</b>	<input type="checkbox"/> Standard	+	
		-	
<b>L</b>	<input type="checkbox"/> Standard	+	
		-	
<b>H</b>	<input type="checkbox"/> Standard	+	
		-	
<b>T</b>	<input type="checkbox"/> Standard	+	
		-	
<b>Quantity:</b>			

SLEEVE #2			
Dimension	Tolerance		
<b>D</b>	<input type="checkbox"/> Standard	+	
		-	
<b>B</b>	<input type="checkbox"/> Standard	+	
		-	
<b>G</b>	<input type="checkbox"/> Standard	+	
		-	
<b>N</b>	<input type="checkbox"/> Standard	+	
		-	
<b>L</b>	<input type="checkbox"/> Standard	+	
		-	
<b>H</b>	<input type="checkbox"/> Standard	+	
		-	
<b>T</b>	<input type="checkbox"/> Standard	+	
		-	
<b>Quantity:</b>			

FAX TO 800-462-6653 OR E-MAIL TECH@PROCOMPS.COM

CONTACT:	COMPANY NAME:	PHONE #:	FAX #:
REFERENCE #:	ACCOUNT #:	E-MAIL ADDRESS:	